
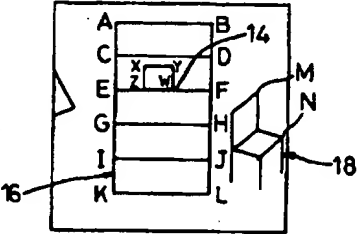






INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : H04N 5/272</p>	A1	<p>(11) International Publication Number: WO 97/26758</p> <p>(43) International Publication Date: 24 July 1997 (24.07.97)</p>
<p>(21) International Application Number: PCT/GB97/00029</p> <p>(22) International Filing Date: 7 January 1997 (07.01.97)</p> <p>(30) Priority Data: 9601098.8 19 January 1996 (19.01.96) GB</p> <p>(71) Applicant (for all designated States except US): ORAD HI-TEC SYSTEMS LIMITED (IL/IL); 14 Hata'as Street, Savir CTR, P.O. Box 2177, 44425 Kfar Saba (IL).</p> <p>(71) Applicant (for KG KZ RU SI SK UZ only): GOODMAN, Christopher (GB/GB); 22 Village Close, Edwalton, Nottingham NG12 4AD (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): SHARIR, Avi (IL/IL); 21 Ani Maamin Street, 67727 Ramat Hasharon (IL). TAMIR, Michael (IL/IL); 13 Beit-Tsuri Street, 69122 Tel-Aviv (IL). WILF, Itzhak (IL/IL); 263 Ben-Gurion Road, 47212 Ramat-Gan (IL). PELEG, Shmuel (IL/IL); 45 Bar-Kakhva Street, 91902 Jerusalem (IL).</p> <p>(74) Agent: GILDING, Martin; Eric Potter Clarkson, St. Mary's Court, St. Mary's Gate, Nottingham NG1 1LE (GB).</p>		
<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>		
<p>(54) Title: METHOD AND APPARATUS FOR INSERTION OF VIRTUAL OBJECTS INTO A VIDEO SEQUENCE</p>		
<p>(57) Abstract</p> <p>A computer generated character is inserted into a video film by selection of a sequence from the video, the selector sequence having selected feature points in the first, last and intermediate frames of the sequence, manual insertion of the character into the first and last frames of the sequence and by automatic calculation using the feature points and reference points on the computer generated character, the position of the character in each intermediate frame of the sequence is determined.</p>		
<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  <p>A FRAME 1</p> </div> <div style="text-align: center;">  <p>B FRAME K</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-end; margin-top: 20px;"> <div style="text-align: center;">  <p>C FRAME N</p> </div> <div style="text-align: center;">  <p>D VIRTUAL OBJECT</p> </div> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

METHOD AND APPARATUS FOR INSERTION OF VIRTUAL OBJECTS INTO A VIDEO SEQUENCE

5 The present invention relates to insertion of virtual objects into video sequences and in particular to sequences which have already been previously generated.

10 Computer generated (CG) images and characters are widely used in feature films and commercials. They provide for special effects possible only with CG content as well as for the special look of a cartoon character. While in many instances the complete picture is computer generated, in other instances, CG characters are to be inserted in a live image sequence taken by a physical camera.

15 Prior art describes how CG objects are inserted in a background photograph, for the purpose of architectural simulation [E Nakamae et al., A montage method: the overlaying of the computer generated images onto a background photograph, ACM Trans. on Graphics, Vol. 20, No. 4, 1986 (207-241)]. That method solves the viewpoint from a set of image points, matched with their geographical map locations. In other practical situations, no measured three-dimensional data can be associated with image points. Therefore, insertion is done manually, using a modeller to transform the CG object, until it is registered with the image.

25 Consider the automatic insertion of three dimensional virtual objects in image sequences. While manual techniques are suitable for a single picture, they pose practical problems when processing a sequence of images:

- A typical shot of a few seconds involves hundreds of images, making the manual work tedious and error-prone.
 - Independently inserting the CG objects at each image might introduce spatial jitter over time, although the insertion may look
- 30

perfect at each frame.

In a real motion picture, the apparent motion of the objects and the characters is a combination of the objects ego-motion in a 3D world, and the motion of the camera.

- 5 For CG characters, the ego-motion is determined by the animator. Then, camera motion has to be applied to the characters.

One possible solution is to use motion control systems in shooting the live footage. In such systems, the motion of the camera is computer-controlled and recorded. These records are then used in a straight
10 forward manner to render the CG characters in synchronization with camera motion.

However, in many practical cases, the usage of motion control systems is inconvenient.

- If a known 3D object is present in the sequence, it may be used to
15 solve camera motion, by matching image features to the object's model. If this is not the case, we may try to solve the structure and the motion concurrently [J Weng et al., Error Analysis of Motion Parameter Estimation from Image Sequences, First Intl. Conf. on Computer Vision 1987, pp. 703-707]. These non-linear methods are inaccurate, slowly
20 converging and computationally unstable.

One may note that for the application at hand, we have no use for the explicitly camera model other than projecting the virtual object, at each view of the sequence, using the corresponding camera model. Thus, in the present invention we suggest merging the 3D estimation and
25 projection stages into one process which predicts the image-space motion of the virtual object from image-space motion of tracked features.

The present application provides a method and apparatus for insertion of CG characters into a existing video sequence, independent of motion control records or a known pattern.

According to the present invention there is provided a method of insertion of virtual objects into a video sequence consisting of a plurality of video frames comprising the steps of :

- 5 i. detecting in a one frame (Frame A) of the video sequence a set of feature points;
- ii. detecting in another frame (Frame B) of the video sequence the set of feature points;
- iii. detecting in each frame other than frame A or frame B at least a sub-set of the feature points;
- 10 iv. positioning a virtual object in a defined position in frame A;
- v. positioning the virtual object in the defined position in frame B;
- vi. selecting one or more reference points for the virtual object;
- vii. computing the position of the reference points in each frame
- 15 of the sequence; and
- viii. inserting the virtual object in each frame in the position determined by the computation.

According to a further aspect of the present invention there is provided apparatus for insertion of virtual objects into a video sequence

20 consisting of a plurality of video frames said apparatus including :

- i. means for detecting in one frame (Frame A) a set of feature points;
- ii. means for detecting in another frame (Frame B) the set of feature points;
- 25 iii. means for detecting in each frame other than frame A or frame B at least a sub-set of the feature points;
- iv. means for positioning a virtual object in a defined position in frame A;
- v. means for positioning the virtual object in the defined
- 30 position in frame B;

- vi. means for selecting one or more reference points for the virtual object;
- vii. means for computing the position of the reference points in each frame of the sequence; and
- 5 viii. means for inserting the virtual object in each frame in the position determined by the computation.

In a preferred embodiment of the present invention, the CG character is constrained relative to a cube or other regularly shaped box, the cube representing the virtual object. The CG character is thereby able
10 to be animated.

The present invention will now be described, by way of example with reference to the accompanying drawings, in which :

15 Figure 1 shows an exemplary video sequence illustrating in Figure 1A a first frame of the video sequence; in Figure 1B an intermediate frame (K) of the video sequence; in Figure 1C a last frame of the video sequence and in Figure 1D a virtual object to be inserted into the video sequence of Figures 1A to 1C;

20 Figure 2 shows apparatus according to the present invention;

Figure 3 shows a flow diagram illustrating the selection and storage of feature points;

Figure 4 shows a flow diagram illustrating the positioning of the virtual object in the first, last and intermediate frames;

25 Figure 5 shows a cube (as defined) enclosing a three dimensional moving virtual character; and

Figure 6 shows a flow diagram illustrating the solution of camera transformation corresponding to a frame.

The present invention is related to the investigation of properties of
30 feature points in three perspective views, As an example, consider the

concept of the fundamental matrix (FM). [R Deriche et al., Robust recovery of the epipolar geometry for an uncalibrated stereo rig, Lecture Notes in Computer Science, Vol. 800, Computer Vision - ECCV 94, Springer-Verlag Berlin Heidelberg 1994, pp. 567-576]. Given 2
5 corresponding points in two views, q and q' (in homogeneous coordinates) we can write :

$$q'^T F q = 0$$

where the 3×3 matrix F , which describes this correspondence is known as the fundamental matrix. Given 8 or more matched point pairs, we can in
10 general determine a unique solution for F , defined up to a scale factor.

Now, consider 3 images with two corresponding pixels m_1 and m_2 in images 1 and 2. Where should the corresponding pixel m_3 be in picture 3? Let F_{13} be the fundamental matrix of images 1,3 and let F_{23} be the fundamental matrix of images 2,3. Then m_3 is given by the intersection
15 of the epipolar lines:

$$F_{13}m_1, F_{23}m_2$$

[O. Faugeras and L. Robert, What can two images tell us about a third one? Lecture Notes in Computer Science, Vol. 800, Computer Vision - ECCV 94, Springer-Verlag Berlin Heidelberg 1994, pp. 485-492]

20 The fundamental matrix is used later in the description of the embodiment of the invention. However, the invention is not limited to this specific implementation. Other formulations could be used, for example the concept of tri-linearity (TT) [A. Shashua and M. Werman, Trilinearity of three perspective views and its associated tensor, IEEE 5th
25 Intl. Conf. on Computer Vision, 1995, pp. 920-925]

Specific embodiments of the invention are now described with reference to the accompanying figures.

With reference now to Figure 1, Figure 1A shows a first video frame which is assumed to be the first frame of a sequence, selected as
30 now described.

The sequence can be selected manually or automatically. For each sequence either the operator or an automatic feature selection system searches for a number of feature points in both a first frame (Frame 1) Figure 1A and a last frame (Frame N) Figure 1C. In any intermediate
5 frame such as in Figure 1B (Frame K) a sub-set of the points must be visible. In a preferred embodiment there should be at least 8 (eight) feature points in all intermediate frames since this can be used both for the FM methods which requires at least 8 points along three frames, or the TT method which requires at least 7 points along three frames.

10 In frame 1 (Figure 1A) feature points A-L (12 points) are recognised. In Figure 1B where the camera has tilted and possibly zoomed point B is missing. In Figure 1C all 12 points are again visible. It is noted that in Figure 1A a chair M,N is visible, this being also visible in Figure 1B but not Figure 1C. This chair M.N is not used for
15 calculation.

An object (Figure 1D) is computer generated and in this example comprises a cube 12 (XYZW). The cube 12 is to be positioned on a shelf
14 of a bookcase 16.

In the first scene of the video sequence a chair 18 is shown, but
20 although the chair 18 is present in the intermediate frame (K) Figure 1B it is not present in the last frame in the sequence. Thus it is not used to define points. Similarly cone 20 is present in the last frame but not in the first or Kth frame. Thus this cone 20 is not used but only the bookcase 16 is used.

25 In Figures 1A and 1C all corners of the shelves are visible (A-L). In Figure 1B only 11 out of 12 corners are visible since corner B is missing. However, in all video frames A-L at least a minimum number of feature points are visible. In a preferred embodiment this minimum number is eight and these must be visible in all frames.

30 With reference now to Figure 2, the VDU 22 receives a video

sequence from VCR 24. The video controller 26 can control VCR 24 to evaluate a sequence of video shots as in Figures 1A to 1C to evaluate a sequence having the desired number of feature points. Such a sequence could be very long for a fairly static camera or short for a fast panning
5 camera.

The feature points may be selected manually by, for example, mouse 28 or automatically. Preferably, as stated above, at least eight feature points are selected to appear in all frames of a sequence. When the controller 26 in conjunction with processor 30 detects that there are
10 less than eight points the video sequence is terminated. If further insertion of an object is required then a continuing further video sequence is generated using the same principles.

Assuming therefore that the sequence of video frames I to N has been selected, a computer generated (CG) object 12 is created by
15 generator 32. The CG object 12 is then positioned as desired in the first and last frames of the sequence. The orientation of the object in the first and last frames is accomplished manually such that the object appears to be naturally correct in both frames. The CG object 12 is then automatically positioned in all intermediate frames by the processors 30
20 and 34 as follows with reference to Figures 3 and 4.

From a start 40 processor 1 searches for feature points in a first frame 42 and continues searching for these features until the sequence is lost 44. The feature positions are then stored in store 36 - step 46. The positions of these features in all intermediate frames are then stored in
25 store 36 - step 48.

The CG object 12 is then generated 50, 52 - Figure 4 and positioned on the shelf 14 in a first frame of the video sequence - step 54.

One or more reference points are selected for the CG object - step 56. These could be the four non co-planar corners of the cube 12 or
30 could be other suitable points on an irregularly shaped object.

The positions of the reference points in the first frame are stored in store 38 - step 58.

The CG object is then positioned in the last frame of the sequence - step 60 and the position of the reference points is stored for this position
5 of the CG object in store 38 - step 62.

Using both processor 30 and processor 34 the positions of the reference points for the object 12 are calculated for each intermediate frame i by calculating the FM or the TT using the triplets of reference points in the first frame, last frame and frame i - step 64. The location
10 of the reference points for the object in Frame i is computed from the locations of the corresponding object points in the first and in the last frames, as well as the FM or the TT as described before.

From these positions the virtual CG object 12 is inserted into each frame in accordance with the calculated positions of the reference points -
15 step 66. The insertion is carried out by controller 26 under the control of inputs from processor 34 and from graphics generator 32 also controlled by processor 32. Alternatively, compute the TT of the first, last, and intermediate frames using at least 7 corresponding feature points in the three frames.

20 The process described in Figures 3 and 4 comprises a virtual point prediction using the fundamental matrix or the TT.

In Figures 3 and 4 we:

1. Position the virtual object in the first (1) and last frame (2):
2. For each frame except the first and last frames:
25 2.1 use at least 8 corresponding feature points to compute the fundamental matrix F_{1K} between the first and intermediate frame: use at least 8 corresponding feature points to compute the fundamental matrix F_{NK} between the last and intermediate frame.
30 2.2 For each reference point (to be predicted) such that its

location in the first frame (1 as determined by process 52 is m_1 and its location in frame N is m_N ; compute the lines $F_{1K} m_1, F_{NK} m_N$. Intersect the lines to obtain m_K .

Alternatively, the location of the reference point m_1 can be
5 computed using the TT and its locations in the first and in the last frames.

If, as shown by way of a preferred example the CG object is a cube or other regular solid shape (hereinafter referred to as a cube) there is a possibility of providing an animated figure which is associated with the
10 cube. The figure may be completely within the cube or could be larger than the cube but constrained in its movement in relation to the cube.

Since the cube is positioned relative to the video sequence the animated figure will also be positioned. Thus, if for example the cube
15 was made a rectangular box which was the size of shelf 16, then a rabbit could be made to dance along the shelf.

It may be seen therefore that the example described in Figure 4, is a complete recipe for wire-frame virtual objects, since it allows to compute the position of all vertices at each intermediate from.

20

However, this solution is not complete for most practical cases, where surface rendering and object ego-motion are required. For these cases we must derive a three-dimensional virtual object description at each frame.

25 We now describe how we deal with surface rendering and ego-motion.

In step 54 when we position the virtual object the transformation applied to the model in 52 can be stored and the inverse of the transformation constitutes a camera transformation due to the duality
30 between the camera and object motions.

Therefore when we generate the virtual object in 52 we would prefer to generate it relative to a rectangular bounding box (see Figure 5) and then the vertices of this bounding box can be used as reference points in 64.

5 Given the position of the reference points in the intermediate frames, the camera transformation corresponding to the frame can be solved as indicated in Figure 6 in which in step 68 the model coordinates for the reference points of the virtual object from step 52 of Figure 4 are used with the image coordinates of reference points in the intermediate
10 field (step 70) to combine to solve camera transformation information (step 72) and this is then stored in store 35 (Figure 1) - step 74.

 Solving camera transformation information from image coordinates of reference points is described in [C.K. Wu et al., Acquiring 3-D spatial data of a real object, Computer Vision, Graphics and Image Processing
15 28, 126-133 (1984)].

 Now, with reference to Figure 5, this transformation is applied to the actual object so that if we allow the virtual character 76 to move relative to the bounding box 78 in the object coordinate system then we take the animated model (character) at each intermediate frame and further
20 transform it by the camera transformation computed as described above.

 The animated model will therefore move naturally and the correct perspective etc will be provided by the camera transformation system as calculated above.

 An alternative method to insert an object having ego motion is to
25 generate it manually only in the coordinate systems of frame A and frame B. This can be manually adjusted by an animator for correct appearance in both images. The entire object can then be reprojected into all other frames by using its locations in Frames A and B, and the FM or TT methods.

30

CLAIMS

1. A method of insertion of virtual objects into a video sequence consisting of a plurality of video frames comprising the steps of :
 - 5 i. detecting in a one frame (frame A) of the video sequence a set of feature points;
 - ii. detecting in another frame (frame B) of the video sequence the set of feature points;
 - 10 iii. detecting in each frame other than frame A or frame B at least a sub-set of the feature points;
 - iv. positioning a virtual object in a defined position in frame A;
 - v. positioning the virtual object in the defined position in frame B;
 - vi. selecting one or more reference points for the virtual object;
 - 15 vii. computing the position of the reference points in each frame of the sequence; and
 - viii. inserting the virtual object in each frame in the position determined by the computation.
- 20 2. A method as claimed in claim 1 in which the computation of the position of the reference points (step vii) is carried out by calculation of the positions of the feature points in each intermediate frame and by geometric transformation of the position of the reference points in relation to the feature points.
- 25 3. A method as claimed in claim 1 or claim 2 in which the virtual object is represented by a box, the reference points being corners of the box.
- 30 4. A method as claimed in claim 3 in which a virtual character is

positioned within or in fixed relationship to the box.

5. A method as claimed in claim 4 in which the virtual character is animated.

5

6. A method as claimed in any one of claims 1 to 5 in which the set of feature points is selected automatically.

7. A method as claimed in anyone of claims 1 to 6 in which the
10 computation of the position of the feature points is carried out by tracking of each feature point on a frame by frame basis.

8. Apparatus for insertion of virtual objects into a video sequence consisting of a plurality of video frames said apparatus including :

- 15 i. means for detecting in one frame (frame A) a set of feature points;
- ii. means for detecting in another frame (frame B) the set of feature points;
- 20 iii. means for detecting in each frame other than frame A or frame B at least a sub-set of the feature points;
- iv. means for positioning a virtual object in a defined position in frame A;
- v. means for positioning the virtual object in the defined position in frame B;
- 25 vi. means for selecting one or more reference points for the virtual object;
- vii. means for computing the position of the reference points in each frame of the sequence; and
- 30 viii. means for inserting the virtual object in each frame in the position determined by the computation.

9. Apparatus as in claim 8 including means for representing the virtual object.
- 5 10. Apparatus as claimed in claim 9 including means for positioning a virtual character within a rectangular box.
11. Apparatus as claimed in claim 10 including means for animating the virtual character.
- 10 12. Apparatus as claimed in claim 8 including means for automatically selecting the set of feature points.
13. Apparatus as claimed in claim 8 in which the means for
15 computation of the position of the feature point comprises means for tracking of each point on a frame by frame basis.

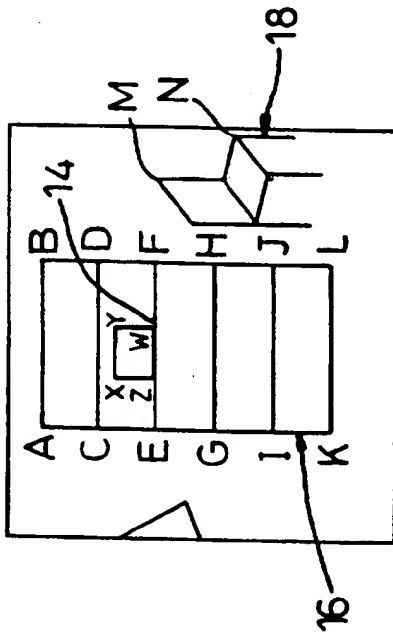


Fig. 1A
FRAME I

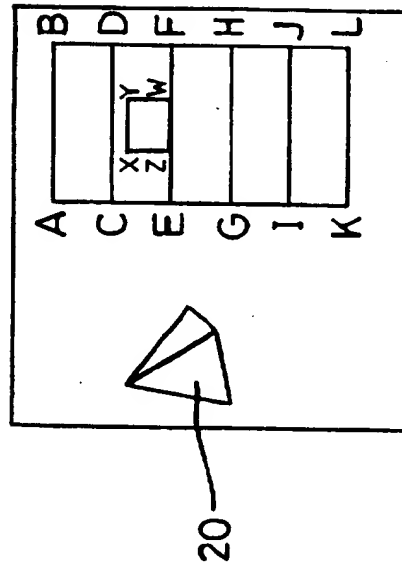


Fig. 1C
FRAME N

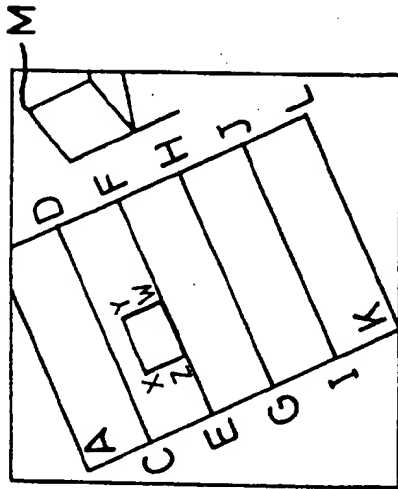


Fig. 1B
FRAME K

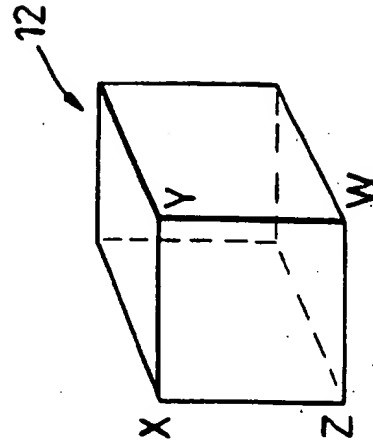
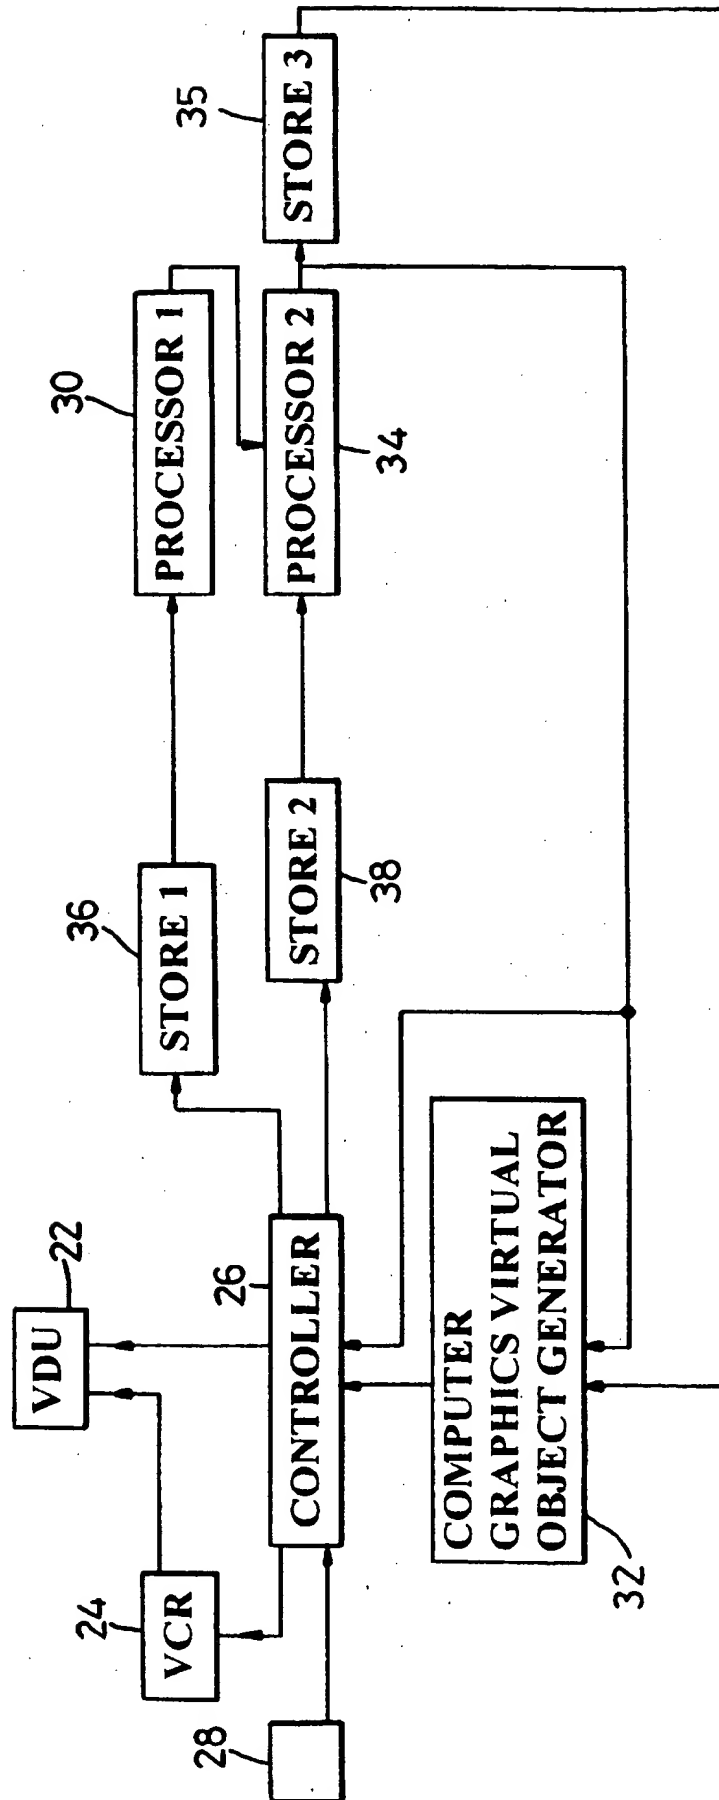
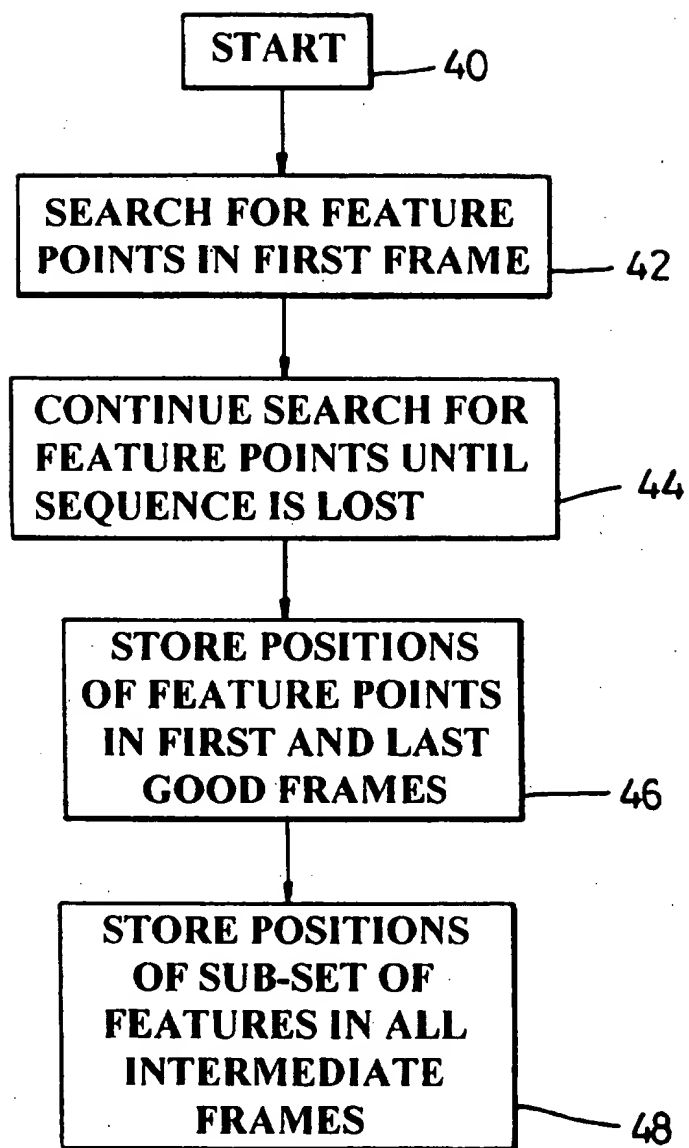
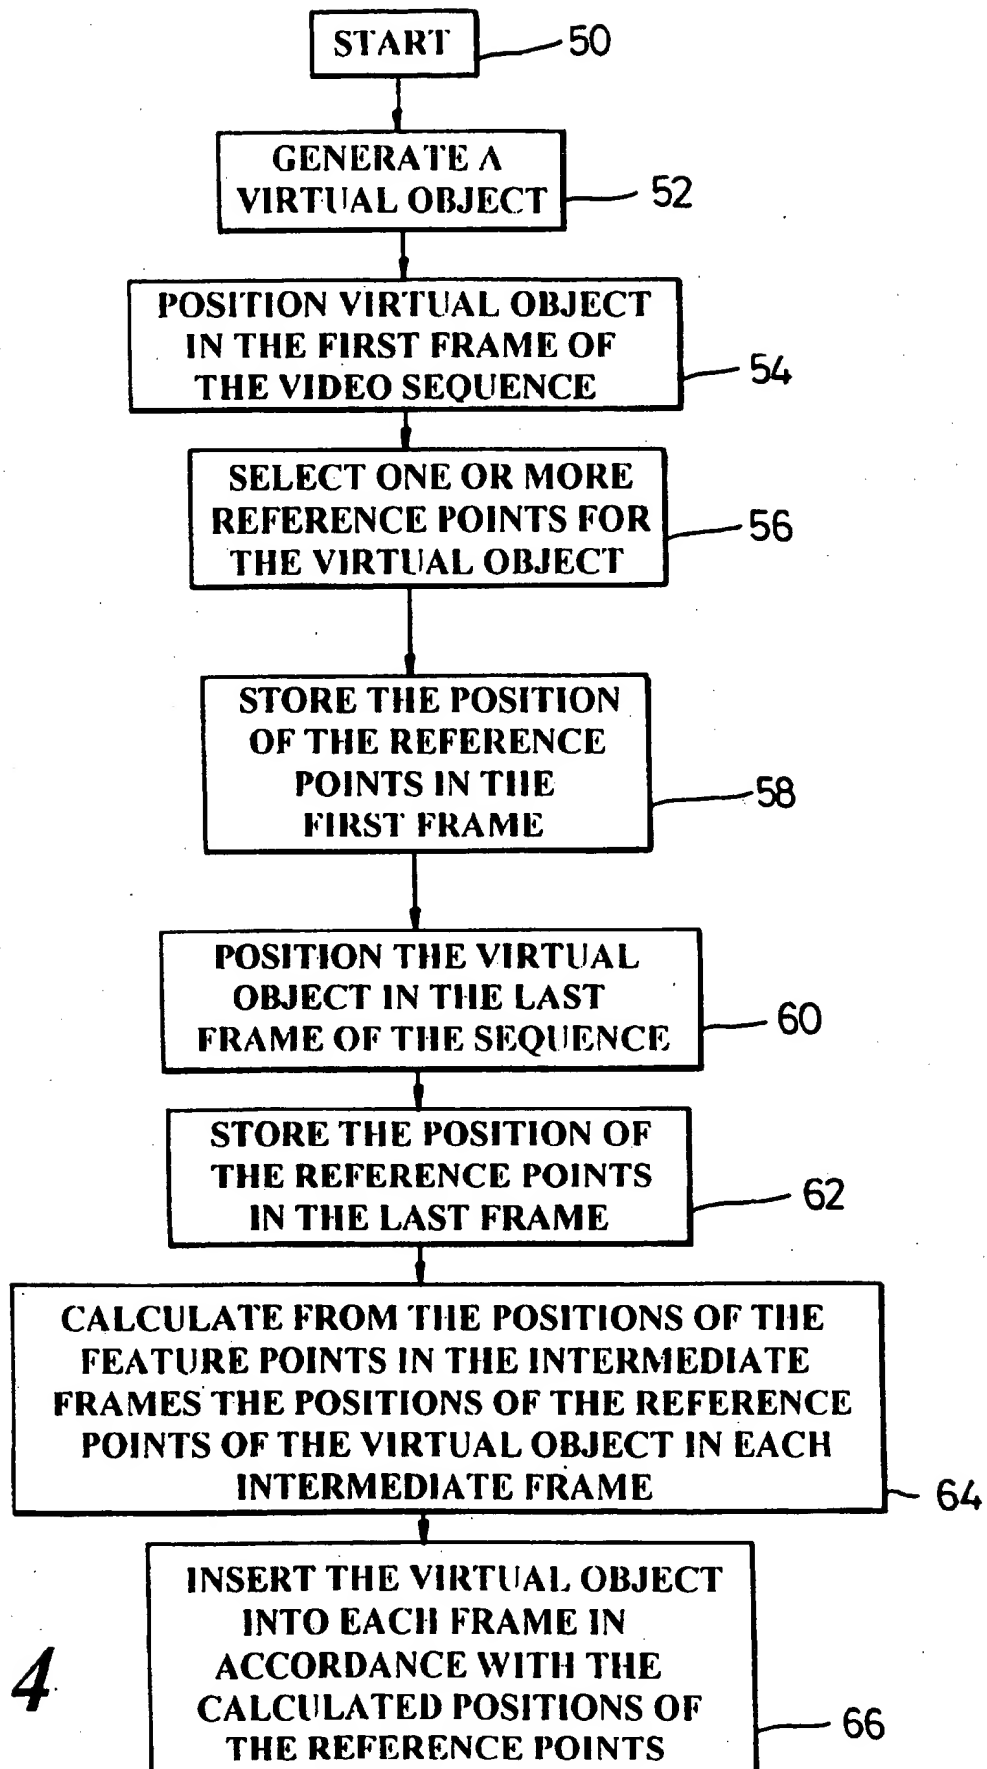
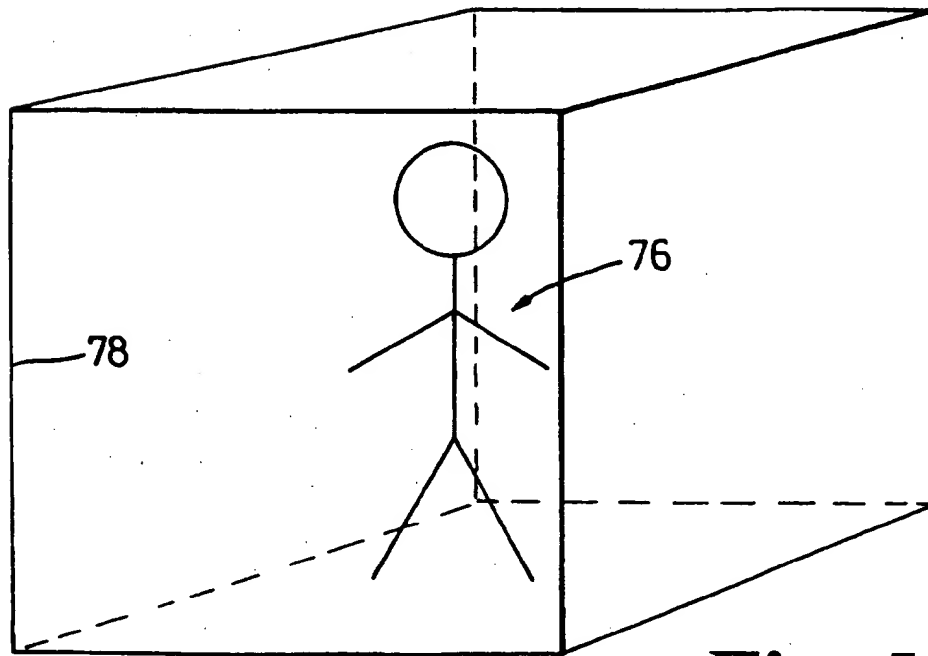
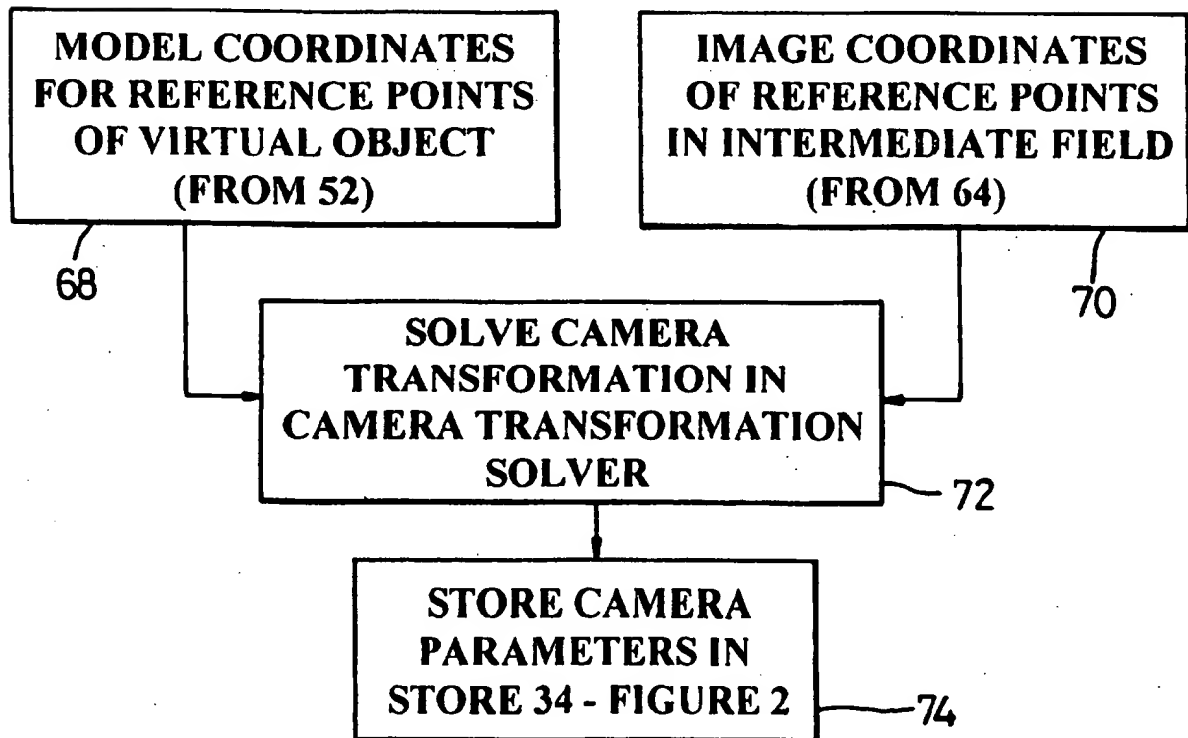


Fig. 1D
VIRTUAL OBJECT

*Fig. 2*

*Fig. 3*

*Fig. 4*

*Fig. 5**Fig. 6*

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N5/272

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	WO 95 25399 A (SCITEX AMERICA CORP ;KREITMAN HAIM (IL); BAR EL DAN (IL); AMIR YOE) 21 September 1995 see page 8, line 24 - page 15, line 8; figures 1-7 ---	8-10,12, 13 11 1-7
X A	US 5 436 672 A (MEDIONI GERARD ET AL) 25 July 1995 see column 3, line 32 - column 13, line 32; figures 1,2 ---	8-10,12, 13 1-7,11
Y A	US 5 353 392 A (LUQUET ANDRE ET AL) 4 October 1994 see column 1, line 36 - column 3, line 23 --- -/--	11 1-10,12, 13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

29 April 1997

Date of mailing of the international search report

29.05.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Paepe, W

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 30312 A (ORAD INC ;TAMIR MICHAEL (IL); SHARIR AVI (IL)) 9 November 1995 see page 9, line 1 - page 17, line 24; figures 1,2 -----	1-13

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9525399 A	21-09-95	AU 1933495 A	03-10-95
		CA 2179031 A	21-09-95
		CN 1144588 A	05-03-97
		EP 0750819 A	02-01-97
		NO 963811 A	14-11-96
		NZ 282275 A	24-03-97
		PL 316621 A	20-01-97
		US 5491517 A	13-02-96
		ZA 9501403 A	10-01-96

US 5436672 A	25-07-95	EP 0684732 A	29-11-95
		JP 8202879 A	09-08-96

US 5353392 A	04-10-94	FR 2661061 A	18-10-91
		DE 69107267 D	23-03-95
		DE 69107267 T	08-06-95
		EP 0477351 A	01-04-92
		ES 2068581 T	16-04-95
		WO 9115921 A	17-10-91
		HK 165895 A	03-11-95
		JP 5501184 T	04-03-93
		US 5515485 A	07-05-96

WO 9530312 A	09-11-95	IL 109487 A	12-09-96
		AU 2430295 A	29-11-95
		EP 0758515 A	19-02-97
